


# Compact and productive colour multifunctionals

These feature rich A4 multifunctional devices are designed for cost conscious businesses that require productive high quality colour communication for small workgroups. A compact design means they fit perfectly into small office environments.

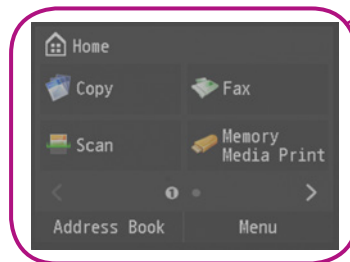

## Productivity:

- Simple operation with a 8.9 cm colour touch and swipe user interface
- A range of flexible mobile printing and scanning capabilities, such as Apple AirPrint™, Mopria printing and Canon's optional uniFLOW solution, support mobile worker efficiency
- Up to 2,300 sheet paper capacity for busy workgroups and departments in any size organisation
- Enhanced productivity and paper saving with auto duplex functionality
- Easily scan and send documents directly to a variety of destinations including email and shared folder
- Easy maintenance design for less downtime
- Canon's V<sup>2</sup> colour (Vivid and Vibrant) imaging technology ensures documents impress and stand out from the rest

## Security and cost control:

- Efficient, high quality colour printing thanks to separate toner and drum technology
- The functionality of many devices in one compact multifunctional device
- Documents remain secure with features such as secure print, pin release and optional PDF password protection
- Greater cost control and security with embedded support for Canon's optional uniFLOW software
- Canon's longer life drum technology reduces the need to replace consumables frequently



PRINT



COPY



FAX



SCAN

Compact and productive  
colour multifunctionals

# imageRUNNER C1325iF/C1335iF/C1335iFC

### Integration and management:

- With their compact design, these devices fit into various office environments where space is a premium either as a desktop or floor standing
- Seamlessly integrate these devices into IT environments, supporting industry standards such as PCL and Genuine Adobe PS
- Reduce fleet management and administration burden with automated meter collection, consumables management, remote updating and diagnostics

### Energy efficient:

- Class-leading Typical Electricity Consumption (TEC)\* ratings
- Consumes as little as 1 W in sleep mode
- Rapid recovery from sleep mode
- ENERGY STAR® qualified
- Qualifies for the stringent Blue Angel Award\*\*

\*Typical Energy Consumptions as defined by ENERGY STAR  
<http://www.eu-energystar.org>

\*\*imageRUNNER C1325iF and imageRUNNER C1335iFC


AirPrint™ and the AirPrint logo are trademarks of Apple Inc.




**imageRUNNER C1325iF**  
511 mm x 549 mm x 610 mm  
**imageRUNNER C1335iF**  
511 mm x 564 mm x 610 mm




**imageRUNNER C1335iFC**



Cassette Feeding Unit-AJ1

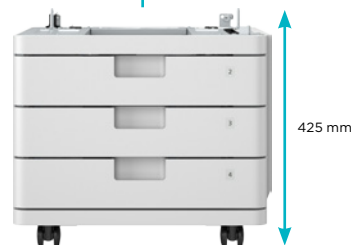

Cassette Feeding Unit-AK1

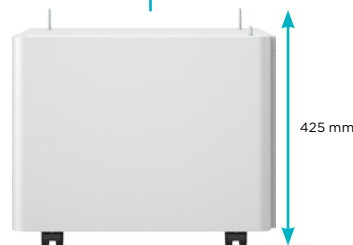

Plain Pedestal

# Technical Specifications

# imageRUNNER C1325iF/C1335iF/C1335iFC

<b>Machine type</b>	Colour A4 Laser Multifunctional (Reader / Printer standard)	<b>Multiple copy</b>	Up to 999 copies
<b>Available core functions</b>	Print, Copy, Scan, Send and Fax standard	<b>Reduction / Enlargement</b>	Zoom: 25 - 400 % in 1% increments Fixed Zoom Ratio: 25%, 50%, 70%, 100%, 141%, 200%, 400%
<b>Printer Specifications</b>		<b>Scan Specifications</b>	
<b>Print speed (BW/Colour)</b>	C1335iF / C1335iFC 35/35ppm (A4 Single-sided), 26/26ppm (A5 Single-sided), 35/35ppm (A4 Double-sided), 26/26ppm (A5 Double-sided)	<b>Optional / Standard</b>	Standard on all models (DADF 50 sheets)
	C1325iF 25/25ppm (A4 Single-sided), 26/26ppm (A5 Single-sided), 25/25ppm (A4 Double-sided), 26/26ppm (A5 Double-sided)	<b>Supported media size/s</b>	A4, A5, B5, Custom sizes: 140 mm to 216 mm x 128 mm to 356 mm (when fed through the DADF) Single-sided scanning: 50 to 105 gsm (DADF) Double-sided scanning: 64 to 105 gsm (DADF)
<b>Printing method</b>	Colour Laser Beam Printing	<b>Supported media weight/s</b>	<u>BW Scan</u> : 100 dpi, 150 dpi, 200 dpi x 100 dpi, 200 dpi, 300 dpi, 200 dpi x 400 dpi, 400 dpi, 600 dpi
<b>Print resolution</b>	2400 dpi equivalent x 600 dpi, 600 dpi x 600 dpi	<b>Scan resolution</b>	<u>CL Scan</u> : 100 dpi, 150 dpi, 200 dpi x 100 dpi, 200 dpi, 300 dpi
<b>Double sided printing</b>	Automatic (Standard)	<b>Double sided scanning</b>	2-sided to 2-sided (Automatic)
<b>Direct print</b>	Automatic (Standard) Direct printing available from USB memory key Supported file types: JPEG, TIFF, PDF	<b>Scan speed</b>	<u>C1335iF/C1335iFC</u> : BW single-sided: 35ipm (A4, 300dpi X 300dpi), BW double-sided: 11ipm (A4, 300dpi X 300dpi) CL single-sided: 35ipm (A4, 300dpi X 300dpi), CL double-sided: 11ipm (A4, 300dpi X 300dpi)
<b>Printing from mobiles or internet-connected devices and cloud-based services</b>	A range of software is available to provide printing from mobile or internet-connected devices. Please contact your sales representative for further information.	<b>Scan methods</b>	<u>C1325iF</u> : BW single-sided: 25ipm (A4, 300dpi X 300dpi), BW double-sided: 9 ipm (A4, 300dpi X 300dpi) CL single-sided: 25ipm (A4, 300dpi X 300dpi), CL double-sided: 9 ipm (A4, 300dpi X 300dpi)
<b>Paper input (Standard)</b>	C1325iF/C1335iF: 1 x 550-sheet (80 gsm) cassette, 100-sheet (80 gsm) multi-purpose tray C1335iFC: 2 x 550-sheet (80 gsm) cassette 6, 100-sheet (80 gsm) multi-purpose tray	<b>Pull scan specifications</b>	Push Scan: Colour Send functionality is standard. Pull Scan: TWAIN / WIA Pull scanning available on all models. Scan to USB Memory Key: Available on all models Scan to mobiles, internet-connected devices: A range of solutions is available to provide scanning to mobile devices, internet-connected devices depending on your requirements. Please contact your sales representative for further information.
<b>Paper input (Option for C1325iF/C1335iF)</b>	1 x 550-sheet cassette (80 gsm) (Cassette Feeding Unit-AJ1) 3 x 550-sheet cassette (80 gsm) (Cassette Feeding Unit-AK1)	<b>Send Specifications</b>	TWAIN/WIA Pull scanning Windows XP Windows Vista/Windows 7/Windows 8/Window8.1 Mac Scan (TWAIN only) Mac OS X 10.5.8 or later *The drivers are available via <a href="http://software.canon-europe.com">http://software.canon-europe.com</a> .
<b>Maximum paper input capacity</b>	2300 sheets (80 gsm)	<b>Optional/Standard</b>	Standard on all models
<b>Paper output capacity</b>	250 sheets (80 gsm)	<b>Send resolution</b>	100 dpi, 150 dpi, 200 dpi x 100 dpi, 200 dpi, 300 dpi, 200 dpi x 400 dpi, 400 dpi, 600 dpi
<b>Finishing capabilities</b>	Standard: Collate, Group	<b>Destinations</b>	E-Mail, Fax, PC (SMB, FTP)
<b>Supported media types</b>	<u>Cassette/s</u> : Thin paper, Plain paper, Recycled paper, Colour paper, Heavy paper, Pre-punched paper, Envelopes* *Envelope support via standard cassette 1 only. <u>Multi-purpose tray</u> : Thin paper, Plain paper, Recycled paper, Colour paper, Heavy paper, Pre-punched paper, Transparency, Labels, Envelopes (No.10 (COM10), Monarch, ISO-C5, DL)	<b>Address Book/Speed dials</b>	LDAP (Max. 50 searchable), Local (Max. 300 including 281 Speed dials)
	<u>Paper cassette 1</u> : Standard size: A4, A5, B5, Legal, Letter, Executive, Statement, Envelopes (No.10 (COM10), Monarch, DL) Custom size (98.4 mm to 216 mm X 190.5 mm to 355.6 mm)	<b>File formats</b>	SMB : JPEG, TIFF, PDF, Compact PDF, Searchable PDF E-mail : PDF, Compact PDF, Searchable PDF
	<u>Paper cassettes 2, 3 and 4</u> : Standard size: A4, A5, B5, Legal, Letter, Executive, Statement Custom size (98.4 mm to 216 mm X 190.5 mm to 355.6 mm)	<b>Optional Universal Send Feature Sets</b>	Send PDF Security Feature Set-E1@E: Send encrypted PDF and add digital device signature to PDF files.
	<u>Multi-purpose tray</u> : Standard size: A4, A5, B5, Legal, Letter, Executive, Statement, Custom size (98.4 mm to 216 mm x 148 mm to 355.6 mm), Envelopes (No.10 (COM10), Monarch, ISO-C5,DL)	<b>Fax Specifications</b>	
<b>Supported media sizes</b>	<u>Cassette/s</u> : 60 to 163 gsm Multi-purpose tray: 60 to 220 gsm Duplex: 60 to 163 gsm	<b>Optional/Standard</b>	Standard on all models
	<u>Supported media weights</u>	<b>Modem speed</b>	Super G3 33.6 kbps (Up to 3 seconds per page) Standard: 200 x 100 dpi Fine: 200 x 200 dpi Super fine: 200 x 200 dpi Ultra fine: 400 x 400 dpi
<b>Page Description Language(s)</b>	UFRII, PCL5c/6, Adobe PostScript Level 3 (Standard on all models)	<b>Fax resolution</b>	Up to 512 pages <sup>1</sup> Max. 281 Max. 199 dials Max. 310 addresses
<b>Fonts</b>	PCL fonts: 93 Roman, 10 Bitmap, 2 OCR fonts PS fonts: 136 Roman fonts	<b>Other features</b>	Yes Fax Forwarding, Dual Access, PC Fax (TX only)
<b>Operating System compatibility</b>	UFRII: Windows XP / Server 2003 / Vista / Server 2008 / Windows 7 / Server 2008R2 / Windows 8 / Windows 8.1 / Server 2012 / Server 2012R2, MAC OS X (10.5.8 or later) PCL: Windows XP / Server 2003 / Vista / Server 2008 / Windows 7 / Server 2008 R2 / Windows 8 / Windows 8.1 / Server 2012 / Server 2012R2 PS: Windows XP / Server 2003 / Vista / Server 2008 / Windows 7 / Server 2008 R2 / Windows 8 / Windows 8.1 / Server 2012 / Server 2012R2, MAC OS X (10.5.8 or later) PPD: MAC OS 9.1 or later, MAC OS X (10.3.9 or later), Windows XP / Windows Vista / Windows 7 / Windows 8 / Windows 8.1 Please refer to <a href="http://software.canon-europe.com/">http://software.canon-europe.com/</a> for availability of print solutions for other operating systems and environments including AS/400, UNIX, Linux and Citrix. Some of these solutions are chargeable. SAP Device Types are available via the SAP Market Place.	<b>General Specifications</b>	
<b>Copy Specifications</b>		<b>Warm-up time</b>	Approx. 34 seconds from power ON
<b>Copy speed (BW / Colour)</b>	Please refer to the quoted print speeds	<b>Recovery from sleep mode</b>	10 seconds or less
<b>First Copy Output Time (FCOT)</b>	C1335iF/C1335iFC: 5.9 sec / 7.4 sec C1325iF: 8.4 sec / 10.5 sec	<b>Interface type</b>	USB 2.0 Hi-Speed, 1000BaseT / 100Base-TX / 10Base-T, 1 x USB Host (Front), 1 x USB Host (Rear), 1 x USB device Recommended third party wireless solution is Silix SX-BR-4600 WAN For more details please refer to <a href="http://www.silix-europe.com">www.silix-europe.com</a>
<b>(BW / Colour)</b>		<b>Network protocols</b>	TCP / IP* (LPD / Port 9100 / WSD / IPP / IPPS / SMB / FTP), IPX / SPX (NDS, Bindery) *IPv4 / IPv6 support
<b>Copy resolution</b>	Reading: 600 dpi x 600 dpi Printing: 600 dpi x 600 dpi	<b>Memory</b>	1.0 GB
		<b>Control panel</b>	QVGA Color LCD 8.9 cm (3.5 inch) touch / swipe supported display

# Technical Specifications

# imageRUNNER C1325iF/C1335iF/C1335iFC

## Dimensions (W x D x H)

Standard:  
 C1325iF 511 mm x 549 mm x 610 mm  
 C1335iF 511 mm x 564 mm x 610 mm  
 C1335iFC 511 mm x 549 mm x 1035 mm<sup>6</sup>

Optional:  
 C1325iF With Cassette Feeding Unit-AJ1: 511 mm x 549 mm x 1035 mm  
 C1325iF With Cassette Feeding Unit-AK1: 511 mm x 549 mm x 1035 mm  
 C1325iF With Plain Pedestal Type-F1: 511 mm x 549 mm x 1035 mm  
 C1335iF With Cassette Feeding Unit-AJ1: 511 mm x 564 mm x 1035 mm  
 C1335iF With Cassette Feeding Unit-AK1: 511 mm x 564 mm x 1035 mm  
 C1335iF With Plain Pedestal Type-F1: 511 mm x 564 mm x 1035 mm

## Installation space (W x D)

C1325iF: 852 mm x 843 mm  
 (Main unit + Multi-purpose tray open + Cassette drawers open)  
 C1335iF/C1335iFC: 852 mm x 858 mm (Main unit + Multi-purpose tray open + Cassette drawers open)

## Weight

C1325iF/C1335iF: Approx. 43kg excluding toner  
 C1335iFC: Approx. 58kg excluding toner<sup>6</sup>

## Operating environment

Temperature: 10 to 30°C (50 to 86°F)  
 Humidity: 20 to 80 % RH (no condensation)

## Power source

220 - 240 V (±10 %), 50 / 60 Hz (±2 Hz), 3.7 AMP

## Power consumption

Maximum: Approx. 1.5 KW  
 Standby: Approx. 30 W  
 Sleep mode: Approx. 1.0 W or less<sup>2</sup>  
 Time to put the device to sleep mode: 60 sec  
 Typical Electricity Consumption (TEC) rating<sup>3</sup>:  
 1.2 kWh (C1335iF/C1335iFC) / 0.8 kWh (C1325iF)

## Noise levels Sound Pressure<sup>4</sup> (reference data, LpAm, Bystander's position)

Sound Pressure Noise Levels:  
 C1325iF  
 Active: 50 dB  
 Standby: Inaudible (Less than 30dB)  
 C1335iF/C1335iFC  
 Active: 51 dB  
 Standby: Inaudible (Less than 30dB)

## Software and printer management

**iW Management Console:** Server-based software for centralised management of a fleet of devices  
**eMaintenance:** embedded RDS allows remote eMaintenance services such as meter capture, automatic consumables management and remote diagnostics.  
**Remote Firmware System (GDLS):** Allows the remote distribution of firmware.  
**Remote User Interface (RUI):** Web-based interface to each device that helps to provide remote device management and control.  
**Canon Driver Configuration Tool:** A utility for changing the factory default settings of Canon print drivers

## Security features

Standard:  
 IP / Mac Address Filtering, IPSEC, SNMP V3.0, IEEE 802.1X, Secured Print, Department ID  
 Optional:  
 Send PDF Security Feature Set-E1@E  
 The following items require uniFLOW: My Print Anywhere secure print, Data Loss Prevention.

## Consumables

### Toner bottle

C-EXV 48 Black/Cyan/Magenta/Yellow Toner (Yield: BK 16,500 / CMY 11,500 pages)<sup>5</sup>

### Specifications for options

#### Cassette feeding unit

Name: Cassette Feeding Unit-AJ1  
 Description: Optional cassette feeding unit with 1 x 550 sheets paper capacity. Takes the cassette paper capacity up to 1,200 sheets.  
 Dimensions (W x D x H): 511 mm x 508 mm x 425 mm  
 Weight: Approx. 15 kg

Name: Cassette Feeding Unit-AK1  
 Description: Optional cassette feeding unit with 3 x 550 sheets paper capacity. Takes the cassette paper capacity up to 2,300 sheets.  
 Dimensions (W x D x H): 511 mm x 508 mm x 425 mm  
 Weight: Approx. 19 kg

#### Hardware accessories 1

Plain Pedestal Type-F1: The pedestal can be placed under the standard cassette module to raise the device when free-standing. (Height of Pedestal: 426 mm)

#### Hardware accessories 2

Copy Card Reader Attachment-H1:  
 HANDSET-J1 EUR / HANDSET-J1 SA:  
 Copy Card Reader-F1:  
 MiCARD Attachment Kit-A1:

#### Print controller accessories

BARCODE PRINTING KIT-D1@E: Enables barcode printing via jet caps technology.

#### System accessories

Copy Control Interface Kit-C1: Allows connection (CCVI I / F) between 3rd party copy control terminal and Canon's iR-ADV range for cost recovery use.

#### Document security accessories

Send PDF Security Feature Set-E1@E: Send encrypted PDF and add digital device signature to PDF files.

#### Accessibility accessories

ADF ACCESS HANDLE-A1: Attaches to the document feeder, making access easier for seated users.

## Footnotes

<sup>1</sup> Based on ITU-T Standard Chart No. 1

<sup>2</sup> 1 watt sleep mode may not be possible in all circumstances. Certain network configurations and options may prevent the device from entering deep sleep mode. Please refer to the user guide for more information

<sup>3</sup> Typical Electricity Consumption (TEC) rating represents the typical electricity consumed by a product during 1 week, measured in kilowatt-hours (kWh). The test methodology is defined by Energy Star (<http://www.eu-energystar.org>).

<sup>4</sup> Declared noise emission in accordance with ISO 7779

<sup>5</sup> Based on 5% coverage (A4)

<sup>6</sup> C1335iFC cannot be ordered without the Cassette Feeding Unit-AJ1

All specifications subject to change without notice



C1325iF only



Canon Inc.  
 canon.com  
 Canon Europe  
 canon-europe.com  
 English edition  
 © Canon Europa N.V., 2015

Canon (UK) Ltd  
 Woodhatch  
 Reigate  
 Surrey RH2 8BF  
 Telephone no 01737 220000  
 Facsimile 01737 220022  
 canon.co.uk

Canon Ireland  
 3006 Lake Drive  
 Citywest, Saggart  
 Co. Dublin, Ireland  
 Telephone No: 01 2052400  
 Facsimile No: 01 2052525  
 canon.ie

